



Ø 4 mm-Einbaubuchsen

Ø 4 mm Panel-mount Sockets

Douilles Ø 4 mm à visser

LB-I4R-B

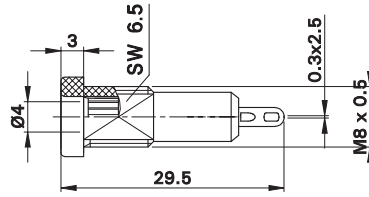

Isolierte, starre Ø 4 mm-Buchse. Messingblech, gerollt. Montage durch Festschrauben in Bohrungen von Platten oder Gehäusen.

Lötanschluss.

Insulated Ø 4 mm rigid socket. Rolled brass sheet. The socket can be screw-mounted in predrilled panels.

Solder connection.

Douille rigide Ø 4 mm, isolée. Bande en laiton, roulée. A visser dans des perçages de panneaux ou de boîtiers.

Raccord à souder.

Typ Type Type	Best.-Nr. Order No. N° de Cde	Bemessungsspannung / -strom Rated voltage / current Tension / intensité assignée	Einzelteile / Mitgeliefertes Montagematerial Component parts / Supplied assembly material Pièces détachées / Matériel de fixation livré	*Farben *Colours *Couleurs
---------------------	-------------------------------------	--	---	----------------------------------

LB-I4R-B	23.0450-*	30 V _{AC} ~ 60 V _{DC} / 25 A	BI-LB-I4R-B, 23.8111- 1x MU/M8x0,5 (→ 189)	<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; padding: 2px; margin-right: 10px;">Ni</div> <div style="display: flex; gap: 5px;"> <div style="background-color: black; color: white; padding: 2px;">21</div> <div style="background-color: red; color: white; padding: 2px;">22</div> <div style="background-color: blue; color: white; padding: 2px;">23</div> <div style="background-color: yellow; color: black; padding: 2px;">24</div> <div style="background-color: green; color: white; padding: 2px;">25</div> </div> </div>
----------	-----------	--	---	--

29